




P6 P8 P10 Outdoor Led Display Screen Video Panel High Brightness For Advertising

Our Product Introduction


Basic Information

- Place of Origin: China
- Brand Name: TOPLED
- Certification: CE ROHS FCC
- Model Number: P1.25-P10
- Minimum Order Quantity: 2
- Price: Negotiate
- Packaging Details: Wooden case/Carton box/Flight case
- Delivery Time: 10-25 days
- Payment Terms: L/C, T/T, Western Union, MoneyGram
- Supply Ability: 50000 per month

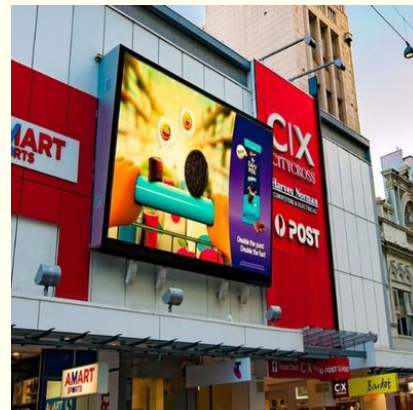

Product Specification

- Pixel Pitch(mm): P1.25-P10 Available
- LED Configuration: 1R1G1B
- Module Size(mm): Customize
- Module Resolution: Customize Pixel
- Grey Scale: 14-16bit
- Refresh Rate(HZ): 1920/2880/3840HZ
- Panel Power Consumption(W): 200-800W
- Display Function: Video
- Highlight: **bright led display, large led display panels**

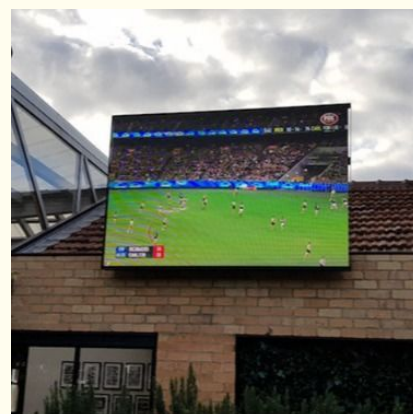


for more products please visit us on highbrightnessleddisplay.com

Product Description

Outdoor High Brightness P6/P8/P10 LED Display Screen for Advertising Video Panel

Outdoor High Brightness P6/P8/P10 LED Display Screen for Advertising Video Panel		
NO	HD small pixel LED display	P1.5625 / P1.667/ P1.923/ P2
1	Hot rental LED display	P3 /P3.91 /P4 /P4.81 /P5.95 /P6 / P6.25/P6.67
2	Outdoor fixed LED display	P4/P5 /P6 /P8 /P10 /P16 /P20
3	LED Control System	Nova Star / LINSN /Colorlight /Listen
4	LED	Nation Star /Epistar /Kinglight
5	IC	MBI5124 /5153 IC
6	Power supply	Meanwell / G-energy
7	Cabinet kind	Iron /Aluminum /Die-casting /Fiber Aluminum
NO	Parameter	
1	Pixel Pitch	6/8/10 mm
2	Cabinet Size	960*960mm / 768*768mm /1024*1024mm
3	Pixel density	27,777 dots/m2 /15,625dots/m2 / 10,000 dots/m2
4	Color temperature	6000K--8000K
5	Viewing angle	H:140;V:140
6	Brightness	5500-7500 cd/m2 ,brightness automatically adjusted
7	Gray level	256 RGB each ,display 16.7M colors ,vivid and perfect video effect
8	Dead LED lamp rate	≤0.1‰
9	Non-Flatness	<0.2mm
10	Module interval	<0.2mm
11	Packaging Gross Weight(KG)	45 kg (Estimated data)
12	Packaging dimension	1m*1m*1.15 m (6cabinet in one case)
13	Maximal power/m2	P6 /P8 :1000 W/m2 P10 : 800 W/m2
14	Brightness adjusted	256 grade by auto-optic/color &8 grade by hand
15	Input signal	RF,S-video,RGB,RGBHV,YUV,YC&Composition,etc
16	Life-span	≥1 00,000 hours
17	MTBF	5,000 hours
18	Frame frequency	25 - 60 Hz / s
19	Refresh rate	≥2,000 Hz ,if you want ≥ 3840 Hz we can design special offer for you
20	Signal Input(with video processor)	HDMI, DVI, VGA, RF, S-Video, RGB, RGBHV, YUV, YC&Composition, etc.
19	Control Distance	120 m (no repeating); Optical fiber transmission: 0.5km- 10km
20	Systems Operating Platform	Windows XP, Win 7, Win8, Win8.1, Win10

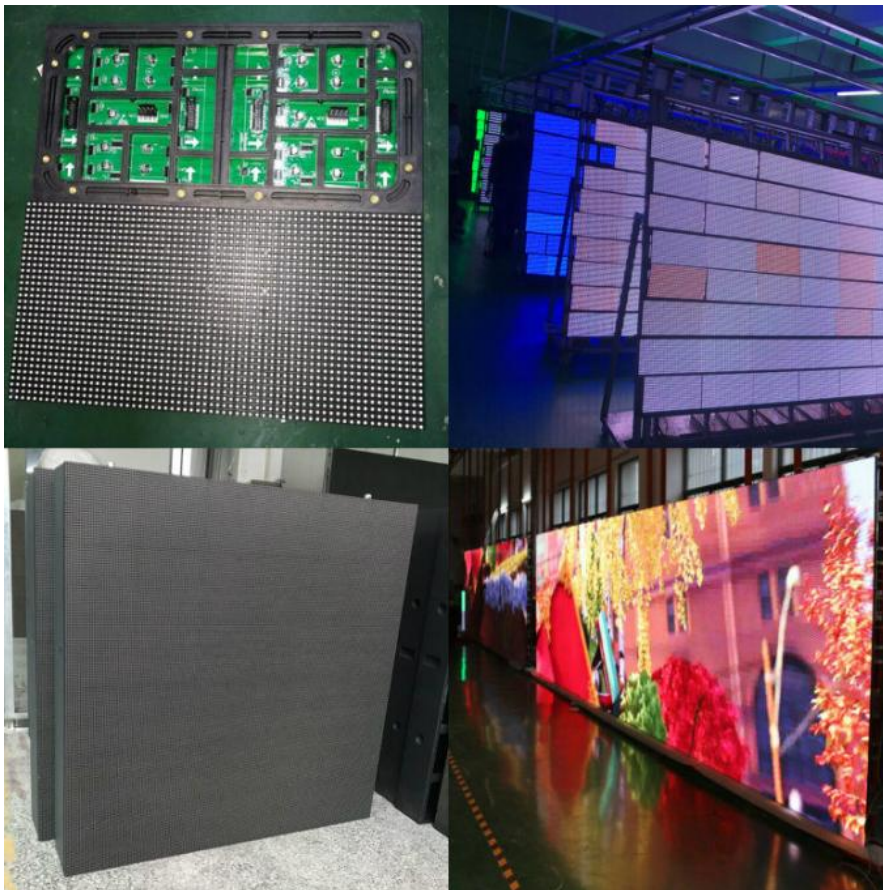

Ideal for outdoor advertisement media, government& enterprise project culture & tourism, sports, propaganda Image, commercial real estate.

Lead Time:Delivery in 10-25 working days.

□



Beijing Silk Road Enterprise Management Services Co.,LTD



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China