



## P2 Indoor Fixed LED Display Screen , Led Video Screens With Steel Cabinet

### Our Product Introduction


#### Basic Information

- Place of Origin: Shenzhen China
- Brand Name: Lecede
- Certification: CE ROHS FCC UL ETL
- Model Number: X2
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Wooden case packing, flight case packing , honeycomb case
- Delivery Time: 15~30 days after deposit
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 10000 /month



#### Product Specification

- Product Name: P2 Indoor Fixed Advertising LED Display Screen Led Video Screens With Steel Cabinet
- Pixel Pitch: 2MM
- Usage: Indoor Advertising LED Display
- Pixel: 25000 Dots/
- Module Size(W\*H): 128x 128 Mm
- LED Lamp: SMD 1515
- Brightness: 1000 Nits
- Refresh Rate:  $\geq 2880$ Hz
- Highlight: led advertising panel,  
outdoor advertising led display

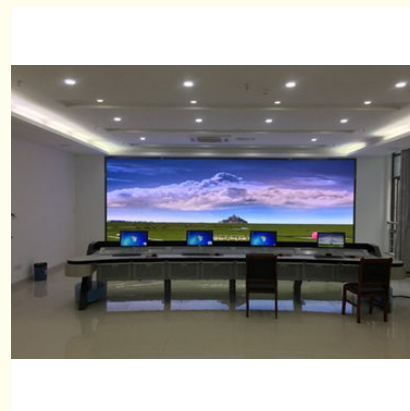

## Product Description

### P2 Indoor Fixed Advertising LED Display Screen Led Video Screens with Steel Cabinet

#### Product Features

1. High brightness and definition, environment friendly,
2. No emissions, radiations, noise or chemical effluent.
3. Perfect heat ventilation, good waterproof and stable performance
4. First-class LED chip: Supplied by Silan, Cree, Epistar or other high strictly selected LED chip

#### SPECIFICATION OF X2 Indoor Advertising LED Display Screen

Model	X2
Pixel pitch(mm)	2
Configuration	SMD 1515
Module dimension(mm)	128x128
Module weight(kg)	0.2
Cabinet dimension(mm)	512x512x75
Pixel density(dots/ )	250000
Flatness error(mm)	≤0.1
Viewing angle	140°/140°(Horizontal/Vertical)
Brightness(cd/ )	1000
Color temperature(K)	5000~9500 (Adjustable)
Contrast	5500:1
Repetition frequency	50/60Hz
Refresh frequency(Hz)	≥2880
Gray scale	16bit
Ave. power(W/ )	290
Max power(W/ )	560
Working temp./humidity	-10~40 /10%~80%RH
Storing temp./humidity	-20~60 /10%~85%RH
Cabinet material	Iron/Aluminum
Maintenance	Front/Rear maintenance
Protection	IP40/IP43
Driving mode	Constant current driver
Scanning	1/30 S
Power requirements	AC90~264V, 47~63Hz
Life time(hrs)	100,000

High-resolution screens make your indoor space lively and help entertain your visitors by viewing exceptional quality content. Fixed LED displays can be architecturally designed to take cylindrical, conclave or oval shapes enhancing the aesthetics of the ambience.



**Beijing Silk Road Enterprise Management Services Co.,LTD**



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China