




Excellent Effect P1.667 HD Led Display , Led Wall Display Screen Small Pixel Pitch

Our Product Introduction

Basic Information

- Place of Origin: Guangdong
- Brand Name: TOPLED
- Certification: CE, ROHS, FCC, ISO9001, ISO14001
- Model Number: Indoor p1.667
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Wooden case, flight case, honeycomb.
- Delivery Time: 15-20 Working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000 SQM/Month

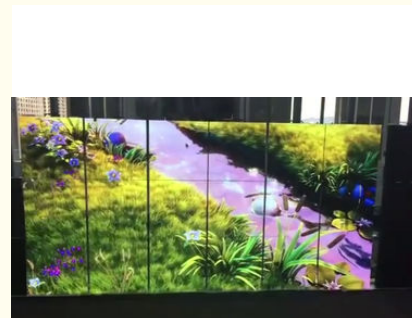

Product Specification

- Pixels: 1.667mm
- LED Chip: Cree + Silan
- Scan Mode: 1/30
- Refresh Rate: 3840
- LED Type: SMD1010
- Module Size: 200*150mm
- Highlight: fine pitch led display, hd led display

for more products please visit us on highbrightnessleddisplay.com

Product Description

Excellent Effect HD Video Indoor P1.667 Small Pixel Pitch LED Display

Product Description

1. Gorgeous Picture: Non-reflective screen, which brings better viewing experience.
2. Perfect Image: Our products use special IC for LED which owns high refresh rate and achieves no shadows
3. Light Weight: The body uses aluminum profile stitching weighing 5-8kg, which is light and non- corrosive.
4. Elegant Appearance: We adopt CNC processing technique to produce standard module and cabinet which can easily do seamless assemble.
5. Standard Size: We use professional buckles and standard modular panels which can snap together easily.

Parameters

Pixel Pitch(mm)	1.667
Physical Density	360,000
LED Configuration	1RGB
LED type	SMD1010
Module Size	200×150
Module Resolution	120×90
Module Power Consumption	18W
Driving Mode	Constant Current IC
Scanning Mode	1/30
Horizontal Viewing Angle	140
Vertical Viewing Angle	120
Brightness	900
Grey Scale	16bit
Refresh Rate	≥3840
Cabinet Resolution	240×180
Cabinet Max Consumption	75
Cabinet Average Power Consumption	25
Cabinet Size	400×300
Cabinet Weight(kg)	4.3KG
Cabinet Thickness	85mm
Cabinet Material	Die-casting Aluminum
Color	>16.7
Input Voltage	AC 110V~220V +/-10%
Frame Frequency	≥60
Protection Level	IP45
Working Temperature()	-20° ~+65°
Storage Humidity Range(RH)	40%~60%
Life Span(H)	100,000 hours

Cabinet

Aging Test



Beijing Silk Road Enterprise Management Services Co.,LTD



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China