




60*45 Dots Resolution Small Pixel Pitch LED Display P2 Indoor Full Color Video Screen

Our Product Introduction

Basic Information

- Place of Origin: Guangdong
- Brand Name: TOPLED
- Certification: CE, ROHS, FCC, ISO9001, ISO14001
- Model Number: Indoor p2
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Wooden case, flight case, honeycomb.
- Delivery Time: 15-20 Working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000 SQM/Month

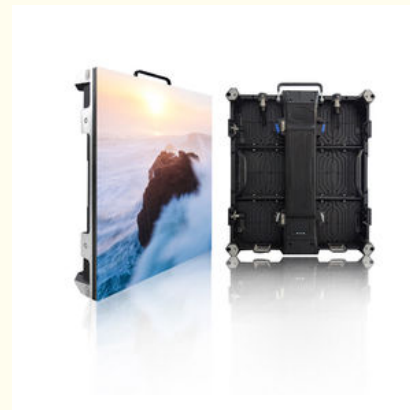

Product Specification

- Brightness: 400-1000
- Scan Method: 1/30
- Module Resolution: 60*45dots
- Module Size: 120*90mm
- Cabinet Size: 480*540mm
- Usage: Video
- Control System: Nova Card
- Physical Density: 250,000
- Highlight: small pixel led display, hd led display



More Images



Product Description

120*90 Dots Indoor High Resolution P2 Small Pixel Pitch LED Display

Hot sale HD indoor p2 led display screen with die-casting aluminum cabinet

Features:

1. IC: By using high-end PWM chip ICN2053 to guarantee 16 gray-scale levels and refreshing of 3840HZ. Moreover, it can make the video more vivid and smooth.
2. Eliminating-shadow-line IC can completely clear off shadow in situations where current open or close.
3. By using Sn62.8/Pb36.8/Ag0.4 to improve stability of the soldered dots and reduce defects rate.
4. By using special PCB board to keep the uniformity of the module.

Specification

Name	Parameter
Pixel Pitch(mm)	2mm
Physical Density	250,000
LED Configuration	1RGB
LED type	SMD1515
Module Size	120×90
Module Resolution	60×45
Module Power Consumption	27W
Driving Mode	Constant Current IC
Scanning Mode	1/30
Horizontal Viewing Angle	140
Vertical Viewing Angle	140
Brightness	1200
Grey Scale	16bit
Refresh Rate	>3840
Cabinet Resolution	240×270
Cabinet Max Consumption	160
Cabinet Average Power Consumption	50
Cabinet Size	480×540
Cabinet Weight(kg)	8kg
Cabinet Thickness	85mm
Cabinet Material	Iron/Aluminum
Color	>16.7
Input Voltage	AC 110V~220V +/-10%
Frame Frequency	60
Protection Level	IP43
Working Temperature()	-40° -+65°
Storage Humidity Range(RH)	10%~90%



Beijing Silk Road Enterprise Management Services Co.,LTD



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China