


Sports P6 Indoor LED Video Wall SMD 3 In 1 LED Encapsulation Technology

Our Product Introduction

Basic Information

- Place of Origin: Guangdong
- Brand Name: TOPLED
- Certification: CE, ROHS, FCC, ISO9001, ISO14001
- Model Number: Indoor p6
- Minimum Order Quantity: Negotiation
- Price: Negotiation
- Packaging Details: Wooden case, flight case, honeycomb.
- Delivery Time: 15-20 Working days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 1000 SQM/Month

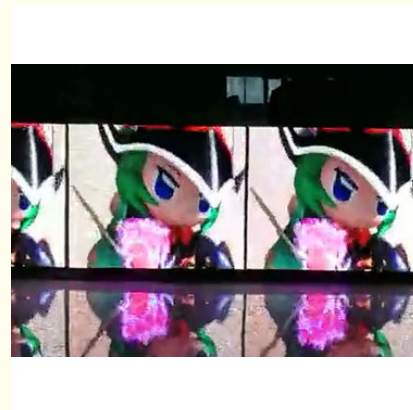

Product Specification

- Brightness: 2200cd/sqm
- Scan Mode: 1/8
- Module Size: 192*192mm
- Cabinet Size: 768*768mm
- Life Span: 100000 Hours
- Module Resolution: 32*32
- Highlight: flexible led display, led video wall display

for more products please visit us on highbrightnessleddisplay.com

Product Description

Sports Events LED Screen P6 Indoor LED Video Wall for Stadium

Product Description

1. SMD 3 IN 1 led encapsulation technology ensure wide view angle and good uniformity
2. Made with die-casting aluminum or fixed installation new cabinets, strong profiles with beautiful outlook and durable
3. Slim and small cabinet iron and aluminium.
4. Flight case package, convenient to transport and collect, easy to move and good protection
5. Fixed installation and Rental design, easy to install and dismantle without any tools in few minutes, save much time for installation and maintainance
6. Can be suspend or fixed installation, Seamless spliced, good outlook

Specification

Name	P6
Pixel Pitch(mm)	6
Physical Density	27,777
LED Configuration	1RGB
LED type	SMD3528
Module Size	192×192
Module Resolution	32×32
Module Max. Current	4.5A
Driving Mode	Constant Current IC
Scanning Mode	1/8
Horizontal Viewing Angle	140
Vertical Viewing Angle	140
Brightness	2000-2200
Grey Scale	16bit
Refresh Rate	1500
Cabinet Resolution	128×128
Cabinet Size	768×768
Cabinet Weight(kg)	30KG
Cabinet Thickness	100mm
Cabinet Material	Iron/Aluminum
Color	>16.7
Input Voltage	AC 110V~220V +/-10%
Frame Frequency	50-60
Protection Level	IP43
Working Temperature()	-20° ~+50°
Storage Humidity Range(RH)	10%~90%
Life Span(H)	100,000 hours

Details





Spanner



Aging Test

Project Case



Beijing Silk Road Enterprise Management Services Co.,LTD



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China