




Flexible Led Curtain Wall Display , Outdoor Led Curtain P16 High Performance

Our Product Introduction

Basic Information

- Place of Origin: China (Mainland)
- Brand Name: Singheng
- Certification: CE RoHS UL FCC
- Model Number: P16
- Minimum Order Quantity: 1 square meter
- Price: USD+To be negotiated+square meter
- Packaging Details: Plywood case
- Delivery Time: About 16 days
- Payment Terms: L/C, D/A, D/P, T/T, Western Union, MoneyGram
- Supply Ability: 3000+square meter+per month

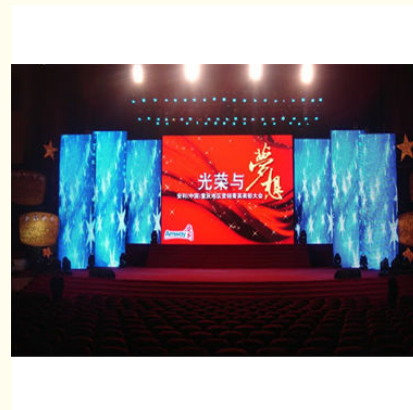

Product Specification

- Application: Video
- Pixel Pitch: 15.625 Mm
- Pixel Density: 4096 Dots/sqm
- Pixel Configuration: 1R1G1B DIP346
- Module Size: 256*128 Mm
- Module Resolution: 16*8dot
- Viewing Angle (Horizontal Axis): 120°
- Viewing Angle (Vertical Axis): 80°
- Refresh Rate: >1920Hz
- Grey Scale: 65536
- Highlight: led video curtain , transparent led curtain

Product Description

Led Curtain Video Wall P16 Led Screen Building Led Curtain Wall Price

Product Description

1. Light weight and low wind load. The light weight is due to the screen grid, which makes the LED display transparent, so its wind load capacity is extremely strong.
2. High performance and low power consumption. The real energy saving comes from: high-brightness, high-efficiency LED lights, high conversion efficiency power supplies.
3. Highly integrated. Built-in power supply and receiving card, each unit can work independently; power and signal are plugged in one line
4. IP67 high protection level. The concept of IP67 is soaking and waterproofing, that is, the overall immersion of the product.

Technical parameters of P16 Led Screen Building

Item	Product parameter
Pixel Pitch	15.625mm
Pixel Density	4096 dots/sqm
Pixel configuration	1R1G1B DIP346
Module Size	256*128 mm
LED brand	Taiwai EPISTAR
Cabinet type	Open
Module Resolution	16*8dot
Weight	25KG/sqm
Viewing Distance	≥20m
Viewing Angle (Horizontal Axis)	120°
Viewing Angle (Vertical Axis)	80°
Refresh Rate	>1920Hz
Grey Scale	65536
Brightness	≥8000cd/sqm
Max Power Consumption	1070w/sqm
Average Power Consumption	440w/sqm
Drive Mode	Static scan
Signal EMC	VGA,DIV,HDMI,SDI
Lifespan	≥10,000 h
Waterproof Grade	IP65
Input Voltage	AC105-235V 50-60HZ
Celsius	-40 ~40
humidity	10~85%RH
Control Distance	Network Cable≤100m, Multimode optical fiber≤500m, Single mode optical≤20 kilometer

FAQ

Q1: To order a display, what information should I offer you?

A: You should provide width and height of the display, the main usage, the viewing distance, the scene photo and special requirements, then I can provide you a quotation. Sometimes you should also provide information such as geographical location, local climate.

Q2: What pixel pitch should I choose on my display?

A: Using the PX screen, it is determined mainly by the viewing distance, the size of the screen, the desired effect and the customer budget. It is generally believed that P5 is suitable for watching outside 5 meters. P10 is suitable for watching outside 10 meters. Of course, this data is not very accurate, and the customer can just refer to it. It also depends on the size of the screen, generally it is considered that more than 100 thousand pixels for a full color display then have a standard effect.

Q3: Can I order a sample?

A: Yes.We welcome customers to order sample to check the quality and service.

Q4: Is it OK to print my LOGO on your product?

A: Yes.We support OEM and ODM service.

Q5: How long is the transportation time?

A: Shipping:20-30 days.Airlift:3-7 days



Beijing Silk Road Enterprise Management Services Co.,LTD



8618888888888



andy@gmail.com



highbrightnessleddisplay.com

Room 402.Dongbao Building,No.19 Dongbao Road,Songjiang,Shanghai 201613,China