

High Gray Scale Transparent LED Display Full Color 4100 Nits Brightness

Shenzhen China LECEDE

T10

Negotiation

MoneyGram 10000 /month

honeycomb case

15~30 days after deposit

L/C, D/A, D/P, T/T, Western Union,

CE ROHS FCC UL ETL

Wooden case packing, flight case packing ,

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: Negotiation
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

• Highlight:	transparent led panel, transparent glass led screen
• Life Span:	100000 Hours
Gray Level:	16bit
 Brightness: 	4100 Nits
 Cabinet Dimension(W*H): 	500mm*1000mm
• Pixel Composing:	RGB
• Pixel Pitch:	10 Mm

High Gray Scale Transparent Glass Led Display , Full Color Clear Led Screen

Product Description

Function and Technology Character:


- 1. Support multiform file formats, such as VGA, Video, AVI, MOV, MPG, DAT, VOB and so on
- 2. The screen can get singal of camera, video, VCD, DVD, LD, TV and so on.
- 3. Brightness, contrast, saturation can be adjusted automatically by itself and manual.
- 4. Clear picture without flicker and distortion.
- 5. Show everything with your PC synchronously.
- 6. Super correcting technology for distortion.
- 7. One interface for sound signal and two ports for video signal at least.
- 8. Connected and controlled by PC via Lan and remote control.
- 9. Multiform language are available, such as English, French, Germany, Spanish, Russian and so on

Specifications:

No	Specifications	
1.	LED chip	Epistar 3528 (Anti-UV)
2.	Physical Pixel Pitch	10mm
3.	Physical Pixel Density	10000(dots/sqm)
4.	Pixel composition	1R1PG1PB
5.	Moduel Size	320*320mm
6.	Moduel resolution	32*32dots
	Cabinet thickness	1cm
8.	Bracket of cabinet	Easy to install and dismantle
	Brightness	≥ 6000cd/m2
10.	Colors	16.7millio
	Viewing angle	Horizontal 120°-140°, Vertical 90°
	Viewing distance	10m -200m
13.	Soft Rubber Mask	To protect player and LED display itself .
	Scan frequency	>1920 hz
	Video Frame Rate	≥60 fps
	Color temperature	6500°K to 9500°K adjustable
	Control method	synchronous control by PC or Asynchronous control
18.	Life span(half brightness)	≥100,000 hours
19.	Weight	14Kg/sqm
20.	IP rate	IP43 front
	Average power consumption	390W/sqm
22.	Peak power consumption	1000W/sqm
23.	Input voltage	AC220V/50Hz ±10% or AC110V/60Hz ±10% AC380V/60Hz ±10%
24.	Operating Environment	Temperature:-20 - +60 Humidity:10%-95%RH
25.	Operating system	Windows XP/7/8/10 or Mac OS
26.	Type of video signal	S-video, composite video ,RGB ,VGA ,DVI

Applications

Any building with glass wall, for example, bank, shopping mall, theatres, chain stores, hotels, and landmarks etc.

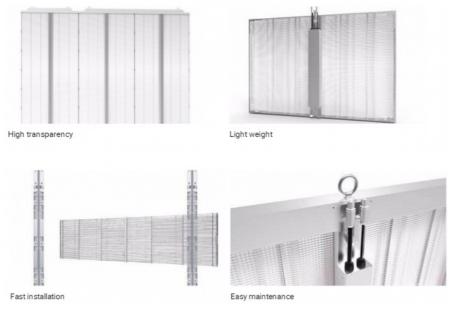

After-sale service

- 1. Our products have two years warranty service ,lifetime free maintenance and upgrade.
- 2. Complaint respond period not exceed 24 hours; maintenance guidance and problem solution supplied in 48 hours.

3. We offered training to our customer who includes operating and maintenance of our products.

4. In the Maintenance period of the LED screen body, free of all maintenance charges; After Maintenance period, only charge the material costs fees free of manual work fees.

5. Full set of documents free of charge, which including installation guidance, software operation manual, easy maintenance manual and control system software CD and so on.

6. If the users find any problem that cannot be solved, please contact with our company, we can response in 24 hours. In order to shorten the maintenance time, Our Company will deploy some spare parts such as power and chips etc.

FAQ:

1. Are you factory?

Yes, we have very rich experience in production and development. you will got better service and delivery on time.

2. How is your delivery time?

We delivery as contract on time, All kinds of led module have in stock. We will be fine as compensation.

3. What is your products packing?

We provide 3 kinds of packing case: carton paper case, wooden packing case and flight packing case.

Carton paper case for led module

Wooden packing case for heavy iron cabinet

Flight packing case for rental aluminum die-casting cabinet

4. Quality gurantee: Life span of LED display screens is more than 100,000 hours All our LED displays have CE,FCC,RoHS certificates.

5. Prompt & Professional service :

Any inquires will be replied within 24 hours in working days and you'll get helpful suggestions from us.

Beijing Silk Road Enterprise Management Services Co.,LTD

andy@gmail.com (2) highbrightnessleddisplay.com

Room 402.Dongbao Building, No.19 Dongbao Road, Songjiang, Shanghai 201613, China